


Structs (C,C++)

Structs

- Contiguously-allocated region of memory
- Refer to members within structure by names
- Members may be of different types
- Example:

```
struct rec
{
    int i;
    int a[3];
    int *p;
};
```

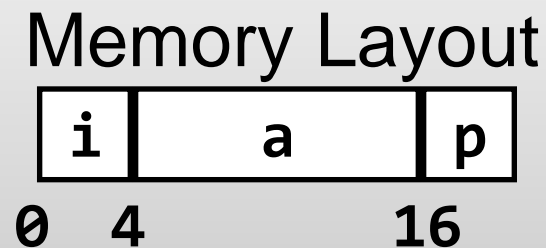

typedef

- Synonyms for variable types – make your program more readable

```
typedef unsigned int size_t;
```

typedef in C

- No need to write “struct Complex” each time:

```
typedef struct ComplexType      Complex.h
{
    double _real, _imag;
} Complex;

Complex addComplex(Complex, Complex);
Complex subComplex(Complex, Complex);
```

C++

- No need to write “struct Complex” each time even if we don’t use a typedef

```
struct Complex Complex.h
{
    double _real, _imag;
};

Complex addComplex(Complex, Complex);
Complex subComplex(Complex, Complex);
```

Structs – poor oop: see List code

Classes (C++)

Motivating Example

Goal:

1. Graphics package
2. Handle drawing of different shapes
3. Maintain list of shapes

Solution #1

```
struct shape
{
    enum
    {
        RECTANGLE, CIRCLE, TRIANGLE
    } _type;
    double _x, _y;
    double _height, _width;
};
void Draw( shape const* Shape )
{
    switch( Shape->type )
    {
        case RECTANGLE:
            ...
        case CIRCLE:
            ...
    }
}
```

Solution #1 - Discussion

Pros:

Simple, direct

Cons:

- Lots of unrelated code together
- Need to save all possible data for all types (line needs two points, circle needs one point and a radius)
- Adding new shapes requires changing all procedures that deal with shape
- a lot of "if"/"switch" in runtime (partly true also for inheritance)

Solution #3 – C++ classes

Language provides tools for objects
Ideas similar to Java, but many
differences in details.

(We will not show this solution now, since we need yet to learn these details...)

Simple Class Declaration

File: Counter.hpp

It is also common to use .h for C++ headers

```
#pragma once
```

```
class Counter
{
public:
    Counter(); // Constructor
    void increment(); // A method
    int value(); // Another one
private:
    int _count;
};
```

Using the class

File: CounterMain.cpp

```
#include "Counter.hpp"
```

```
#include <cstdio>
```

```
int main()
```

```
{
```

```
    Counter cnt; // Call to constructor!
```

```
    printf("Initial value= %d\n", cnt.value());
```

```
    cnt.increment();
```

```
    printf("New value = %d\n", cnt.value());
```

```
}
```

Class Implementation

```
void Counter::increment()
```

```
{
```

```
    _count++;
```

```
}
```



Scope operator

```
int Counter::value()
```

```
{
```

```
    return _count;
```

```
}
```

Class Implementation

Constructor - like a function, but no return type

```
Counter::Counter()  
{  
    _count = 0;  
}
```

How do we compile it?

```
g++ -Wall -Wvla -Werror -g -D_GLIBCXX_DEBUG -std=c++11 -c Counter.cpp -o Counter.o
```

```
g++ -Wall -Wvla -Werror -g -D_GLIBCXX_DEBUG -std=c++11 -c app.cpp -o app.o
```

```
g++ -Wvla -Werror -g -D_GLIBCXX_DEBUG -std=c++11 -Wall Counter.o app.o -o app
```


Declaration + implementation

```
#pragma once
```

```
class Counter  
{  
public:  
    Counter(); // Constructor  
    // A method with inline implementation :  
    void increment(){ _count++; }  
private:  
    int _count;  
};
```

Class Basics: Public/Private

Declare which parts of the class are accessible outside the class


```
class Foo
{
public:
    // accessible from outside
private:
    // private - not accessible from outside
    // (compilation error)
    // but visible to user!
};
```

Class Basics: Public/Private

Declare which parts of the class are accessible outside the class

```
class Foo
{
    public:
        // accessible from outside
    private:
        // private - not accessible from outside
        // (compilation error)
        // but visible to user!
};
```

Without using “dirty” tricks



Example

```
class MyClass
{
public:
    int a();
    double _x;
private:
    int b();
    double _y;
};
```

```
int main()
{
    MyClass foo;
    // legal:
    foo._x = 1.0;
    foo.a();
    //compile error:
    foo._y = 2.0;
    foo.b();
}
```

Example

```
class MyClass
{
public:
    int a();
    double _x;
private:
    int b();
    double _y;
};
```

```
int MyClass::a()
{
    // legal
    _x = 1.0;
    // also legal
    _y = 2.0;
    b();
}
```

Example - Point

```
class Point
{
public:
    Point(int x, int y);
    ~Point();
    int getX() const;
    int getY() const;
private:
    int _x, _y;
};
```

Circle

```
#include "Point.h"

class Circle
{
public:
    Circle(int x, int y, double r);
    ~Circle();
    // ...
private:
    Point _center;
    // ...
};
```

Circle.cpp

```
#include "Circle.h"

Circle::Circle(int x, int y, double r) :
    _center(x,y)
{
    // ...
}

Circle::~~Circle()
{
    printf("in ~Circle()");
}
```


this

The address of the instance for which the member method was invoked

```
class Node
{
    Node* next;
public:
    bool isChild(const Node*) const;
    // ...
};
```

```
bool Node::isChild(const Node* other) const
{
    for (const Node* curr=this; curr; curr=curr->next)
    {
        if (curr==other) return true;
    }
    return false;
}
```

structs

Where did `structs` go?

- In C++ `class==struct`, except that by default `struct` members are **public** and `class` members are **private**:

```
struct MyStruct
{
    int x;
};
class MyClass
{
    int x;
};
```

```
int main()
{
    MyStruct s;
    s.x = 1; // ok
    MyClass c;
    c.x = 1; // error
}
```

struct / class keyword

1. No need to typedef the class declaration to avoid using "`struct MyStruct`" or "`class MyStruct`".
2. But, it is legal. (May be useful if you want to use the same name for a variable and a class which itself is a *bad idea*).

```
int main()
{
    //All legal:
    struct MyStruct s1;
    class MyClass c1;
    MyStruct s2;
    MyClass c2;
}
```

Class Basics - member/static

```
class List
{
public:
    static int getMaxSize();
    int getSize();
    static int max_size=1000; //error! (only outside, below)
    int size=0; //error! (only in ctor, coming slides)
};
```

```
int List::max_size=1000; //ok, in one cpp file
```

```
int main()
{
    List l;
    l.getSize();
    List::getMaxSize();
    l.getMaxSize(); //compiles ok, but bad style
}
```

this

```
static int List::getMaxSize() //no this!  
{  
    return this->size; // compile error!  
    return max_size; // ok  
}  
int List::getSize()  
{  
    return this->size; //ok  
}
```

Class Basics: Constructors

Initialize the class object upon construction

```
class MyClass
```

```
{
```

```
public:
```

```
① MyClass();
```

```
② MyClass( int i );
```

```
③ MyClass( double x, double y );
```

```
...
```

```
};
```

```
MyClass a; // Calls 1
```

```
MyClass b(5); // Calls 2
```

```
MyClass c( 1.0, 0.0 ); // Calls 3
```

Constructors – parameterless ctor

```
class MyClass
{
public:
    MyClass(); // parameterless ctor.
    //...
};
//...
int main()
{
    MyClass a; // parameterless ctor called
    // ...
}
```

Constructors – default parameterless ctor

```
class MyClass
{
public:
    // No ctors
    //...
};
//...
int main()
{
    MyClass a; // default parameterless
               // ctor called
}
```


Constructors – no default parameterless ctor

```
class MyClass
{
public:
    MyClass(int x); // no parameterless ctor.
};

int main()
{
    MyClass a; // complier error -
              // no parameterless ctor.
```

Destructors

1. Ensure propose “cleanup” when the object is destructed
2. Use for freeing memory, notifying related objects, etc.

Class Basics: Destructors

```
#include <cstdlib>
class MyClass
{
public:
    MyClass();
    ~MyClass(); // destructor
private:
    char* _mem;
};
MyClass::MyClass()
{
    _mem=(char*)malloc(1000);
}
MyClass::~~MyClass()
{
    free(_mem);
}
```

```
int main()
{
    → MyClass a;
    if( ... )
    {
        → MyClass b;
        → }
    → }
}
```

C Interface

```
struct IntList;
typedef struct IntList IntList;
IntList* intListNew();
void intListFree(      IntList* List );
void intListPushFront( IntList* List, int x);
void intListPushBack(  IntList* List, int x);
int  intListPopFront(  IntList* List );
int  intListPopBack(   IntList* List );
int  intListIsEmpty(   IntList const* List);

typedef void (*funcInt)( int x, void* Data );
void intListMAPCAR(     IntList* List,
                      funcInt Func, void* Data );
```

C++ Class

In header file:

```
class IntList
{
public:
    IntList();
    ~IntList();
    void pushFront(int x);
    void pushBack(int x);
    int popFront();
    int popBack();
    bool isEmpty() const;

private:
    struct Node
    {
        int value;
        Node *next;
        Node *prev;
    };
    Node* m_start;
    Node* m_end;
};
```

Classes & Memory allocation

Consider this C++ code

```
main()  
{  
    IntList L;  
  
}
```

Compare to C style:

```
main()  
{  
    IntList* L =  
        (IntList*)malloc  
        (sizeof(IntList));  
    free(L)  
}
```

What is the difference?

Classes & Memory allocation

```
IntList* L =  
(IntList*)malloc(sizeof(IntList));
```

Does not call constructor!

Internal data members are not initialized

```
free(L);
```

Does not call destructor!

Internal data members are not freed

new & delete

Special operators:

```
IntList *L = new IntList;
```

1. Allocate memory
2. Call constructor
3. Return pointer to the constructed object

```
delete L;
```

1. Call destructor
2. Free memory

new

Can be used with any type:

```
int *i = new int;
```

```
char **p = new (char *);
```

- new is a global operator
- new ***expression*** invokes the new ***operator*** to allocate memory, and then calls ctor
- Can be overloaded (or *replaced*)
- By default, failure throws exception. Can be changed.
- See <new> header

Global *operator* new (simplified)

```
void *operator new(size_t size)
{
    void *p;
    if((p = malloc(size)) == 0)
    {
        throw std::bad_alloc;
    }
    return p;
}
```

New & Constructors

```
class MyClass
```

```
{
```

```
public:
```

```
① MyClass();
```

```
② MyClass( int i );
```

```
③ MyClass( double x, double y );
```

```
};
```

```
MyClass* a;
```

```
a = new MyClass; // Calls ①
```

```
a = new MyClass(5); // Calls ②
```

```
a = new MyClass( 1.0, 0.0 ); // Calls ③
```

New & arrays

To allocate arrays, use

```
int n = 4;  
int *a = new int[10]; // array of 10  
                        //ints  
IntList *b = new IntList[n];  
                // array of n IntLists
```

Objects in allocated array must have an argument-less constructor!

Allocate array of objects w/o def. cons.

```
int n = 4;
MyClass **arr = new MyClass *[n];
// array of n pointers to MyClass (no
// cons. is invoked)

for (int i=0;i<n;i++)
{
    arr[i] = new MyClass (i);
    // each pointer points to a MyClass
    // object allocated on the heap, and
    // the cons. is invoked.
}
```

Delete & array

Special operation to delete arrays

```
int *a = new int[10];
```

```
int *b = new int[10];
```

```
delete [] a; // proper delete command
```

```
delete b; // may work, but may
```

```
// cause memory leak!
```

Free an allocated array of pointers to objects on the heap

```
int n = 4;
for (int i=0;i<n;i++)
{
    delete (arr[i]);
    // invoked the dest. of each MyClass
    // object allocated on the heap, and
    // free the memory.
}
delete [] arr;
// free the memory allocated for the
// array of pointers. No dest. is invoked
```